

Fiberspar LinePipe™

Reinforced tracer wire



Now there is another advantage to installing Fiberspar LinePipe.


Fiberspar LinePipe offers a reinforced tracer wire that is both cost effective and provides several technical advantages over bare copper wire's low tensile strength. Traditionally, bare copper tracer wire has been buried alongside underground pipes to assist in locating the pipe for service because of its signal conductivity. But now, NOV Fiber Glass Systems customers can get the advantages of reinforced tracer wire, which combines the strength of high-carbon steel with the conductivity and corrosion-resistance of copper. The result is a more cost-effective wire with superior performance vs. 100% copper wire.

Significant advantages over pure copper

- More durable during installation and over the life of your LinePipe, with twice the breaking strength of solid copper
- Reduced material costs
- More stable pricing
- Lighter weight, resulting in reduced shipping costs

Tracer wire specifications

Direct-burial, .0808 in. diameter, steel-core soft drawn high-strength tracer wire, 380 lb average tensile break load, 30 mil high molecular weight/high density yellow polyethylene jacket complying with ASTM-D-1248, 30-volt rating.

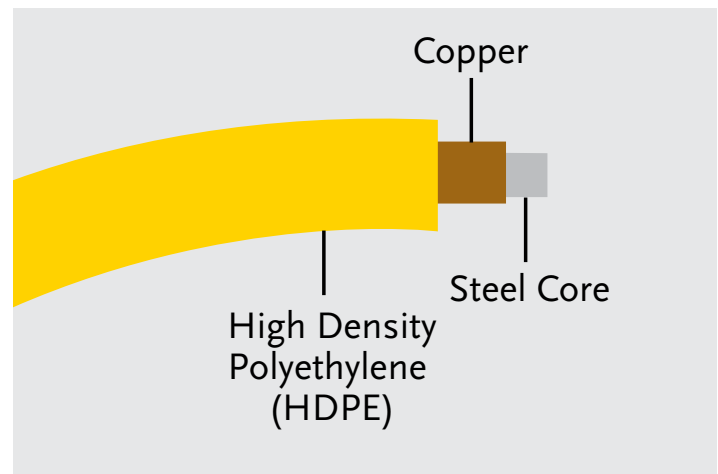

The copper outer layer provides the excellent conductivity of copper to carry the locating signal, while the steel core provides the strength required to resist damage during installation and ensure durability in service.

Fiberspar™ spoolable composite pipe and fittings are covered by one or more of the following U.S. Patents: 6,016,845, 5,921,285, 6,148,866, 6,286,558, 6,357,485, 6,604,550, 6,857,452, 7,285,333, 6,004,639, 6,361,299, 6,706,348, 5,988,702 and one or more of the following Canadian Patents: 2,233,295, 2,282,358, 2,321,536, 2,409,304, 2,305,148, 2,233,345. Additional U.S. and Canadian patents are pending.

National Oilwell Varco has produced this brochure for general information only, and it is not intended for design purposes. Although every effort has been made to maintain the accuracy and reliability of its contents, National Oilwell Varco in no way assumes responsibility for liability for any loss, damage or injury resulting from the use of information and data herein nor is any warranty expressed or implied. Always cross-reference the bulletin date with the most current version listed at the web site noted in this literature.

© 2015 National Oilwell Varco All Rights Reserved
OG6209ENG August 2015

Fiber Glass Systems

17115 San Pedro Avenue, Ste 200
San Antonio, Texas 78232 USA
Phone: 210 477 7500
Fax: 210 477 7560



15HR-0037 / 15HR-00039

API Q1 and ISO 9001 Registered