

# Ameron™

## Centrecon S-Series Hexagonal Pole

### Available in base plate and embedded styles.

Our S-Series poles are well suited for light duty applications such as shopping centers, parking lots, green belts and similar areas. Application can be post top or side mounted. Ameron poles are constructed with the highest quality materials and workmanship to ensure uniformity and long term structural integrity.

#### Features and Benefits

- Prestressed steel and highest quality concrete are centrifugally cast for ultimate strength, durability, and vibration resistance
- Natural stone and terrazzo aggregates maintain a like-new appearance with virtually no maintenance
- Conforms to applicable sections of ACI, AASHTO, ASTM and PCI standards
- Exclusive 10-year warranty

#### Colors and Finishes

A wide range of standard, pre-formulated and custom colors are available. The concrete shafts are lightly blasted to expose the texture and beauty of the natural stone. See separate Aggregates and Finishes sheet for details. We offer Amershield™, a premium graffiti-resistant coating, as well as other durable sealers and protectants that further enhance colors, protect the concrete surface and aid in the removal of graffiti.

#### Durability with a classic touch.




For further information contact us at: 1.800.552.6376



[nov.com/poleproducts](http://nov.com/poleproducts)

# Ameron™ Centrecon S-Series Hexagonal Pole

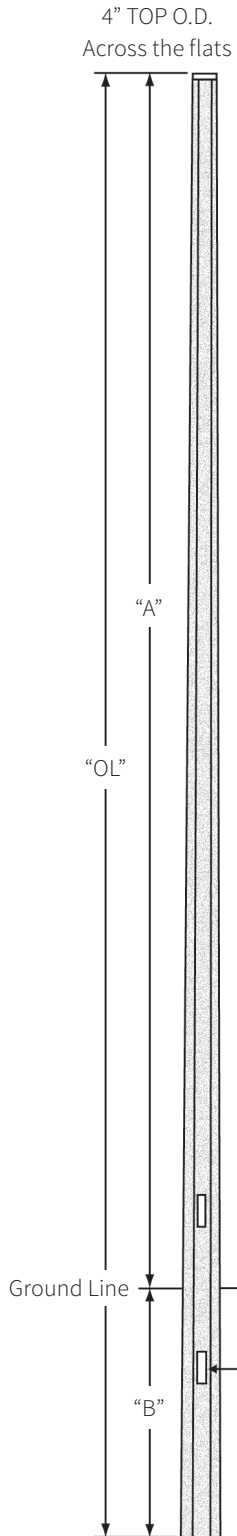

## Base plate style - information

Catalog Number	Pole Height "A"	Base OD	Anchor Bolt	Bolt Circle	Base Plate (Sq)	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
SBH05.5	18'-0"	6-13/16"	3/4" x 24" x 4"	10"	10"	8,400	350
SBH05.8	19'-0"	7"	3/4" x 24" x 4"	10"	10"	9,000	400
SBH07.3	24'-0"	7-3/4"	1" x 36" x 4"	11-1/2"	11"	11,800	500
SBHX08.8	29'-0"	8-5/8"	1" x 36" x 4"	12-1/2"	12"	22,500	600

## Embedded style - information


Catalog Number	Pole Height "A"	Bottom DIA.	Embedded Depth "B"	Overall Length "OL"	Ultimate G.L. Moment (ft. lbs.)	Pole Weight (lbs.)
SEH04.3	14'-0"	6-13/16"	4'-0"	18'-0"	7,100	350
SEH04.6	15'-0"	7"	4'-0"	19'-0"	7,700	380
SEH05.8	19'-0"	7-3/4"	5'-0"	24'-0"	9,000	470
SEH07.3	24'-0"	8-5/8"	5'-0"	29'-0"	11,800	580

**Specifications:** Use Centrecon Specifications


**Colors and finishes:** See Centrecon color selection guide

**Luminaire mounting:** See Mounting Options section for more information


**Anti-graffiti and sealer:** Optional coatings are available for added protection

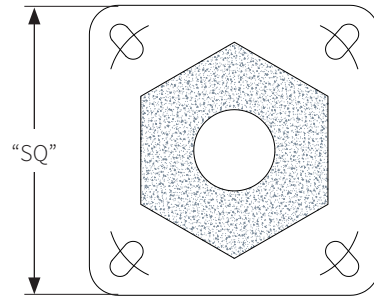

Slotted base plate  
Prestressed pole

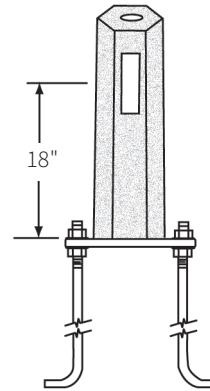

Elevation  
See recommended  
"capping detail"



Shaft cross  
section detail

For further information contact us at: 1.800.552.6376



[nov.com/poleproducts](http://nov.com/poleproducts)

© 2017 National Oilwell Varco - All rights reserved - 11834\_ENG\_v01