
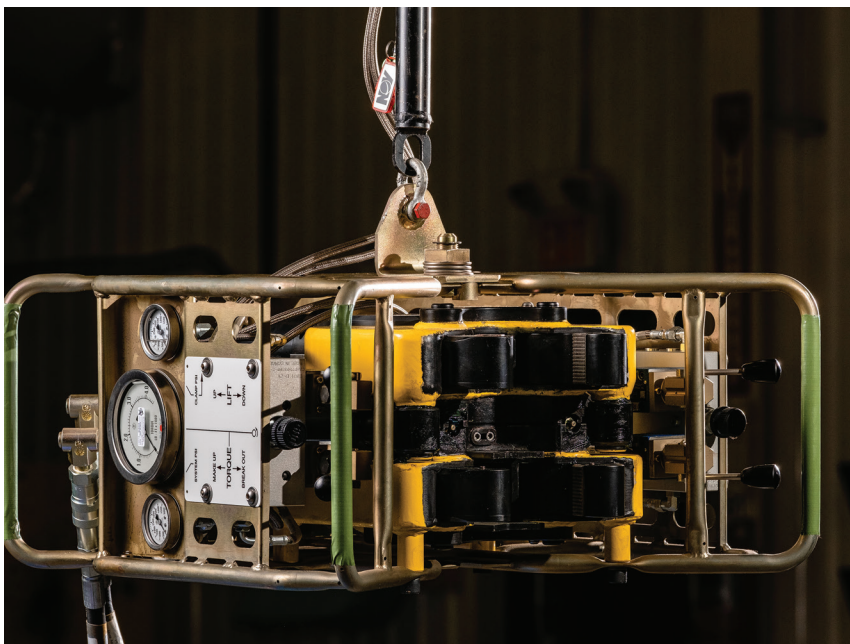


8071 Little Jerk Mini Tong II

The 8071 Little Jerk™ Mini Tong II provides a safe and easy way to make up and break out tool joint connections on small OD tools and pipes. This portable compact service tool offers a fully hydraulic system designed for practicality and with rig floor, well head, and service shop safety in mind.

The back-up and tong are mounted into a durable crash frame that integrates the unit controls making it easily handled and operated by one person. A single set of jaws can grip the full 1¹/₁₆ in. to 3¹/₂ in. OD range and the unit can accommodate a different OD on either side of the connection.

The Little Jerk Mini Tong II operates at a low working pressure and can be powered by a variety of power sources.

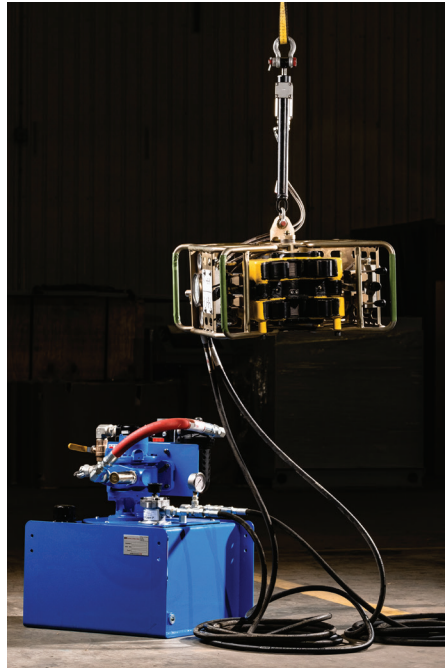

Features and Benefits

- Operated by one person – Safe and easy to use.
- Open mouth design – Allows for easy loading and unloading of the work piece.
- Rigid, compact design – Easily maneuverable and operable in various horizontal or vertical positions.
- Hydraulic lifting cylinder – Hydraulically adjust the vertical position of the tong when operated from a suspended position.
- Adjustable clamp force – Reduces risk of crushing thin walled tools.
- Clamp force proportional to torque – Reduces risk of slippage during make/break.
- Tong dies – One set for entire OD range and can be easily changed when worn.
- Tong – Can be positioned above or below the back-up to best suit the application.

Little Jerk Mini Tong Optional Accessories

Electric power pack	8039-B-2
Pneumatic power pack	8123-B-3
Transportation cage for tong and pneumatic power pack	8142-B-2

Technical Data

Part number	8071-B-15
Tool OD range	1 ¹ / ₁₆ in. - 3 ¹ / ₂ in.
Distance between jaws	3 in.
Minimum torque	400 ft-lb
Maximum torque	4,000 ft-lb
Operating pressure	2,900 psi
Required flow	3.9 gpm
Dimensions (L x W x H)	24 ¹ / ₄ in. x 23 in. x 15 ³ / ₄ in. (without lift cylinder) add 22 ³ / ₄ in. for lift cylinder when hanging
Weight	226 lb