


3K Single Ram BOP

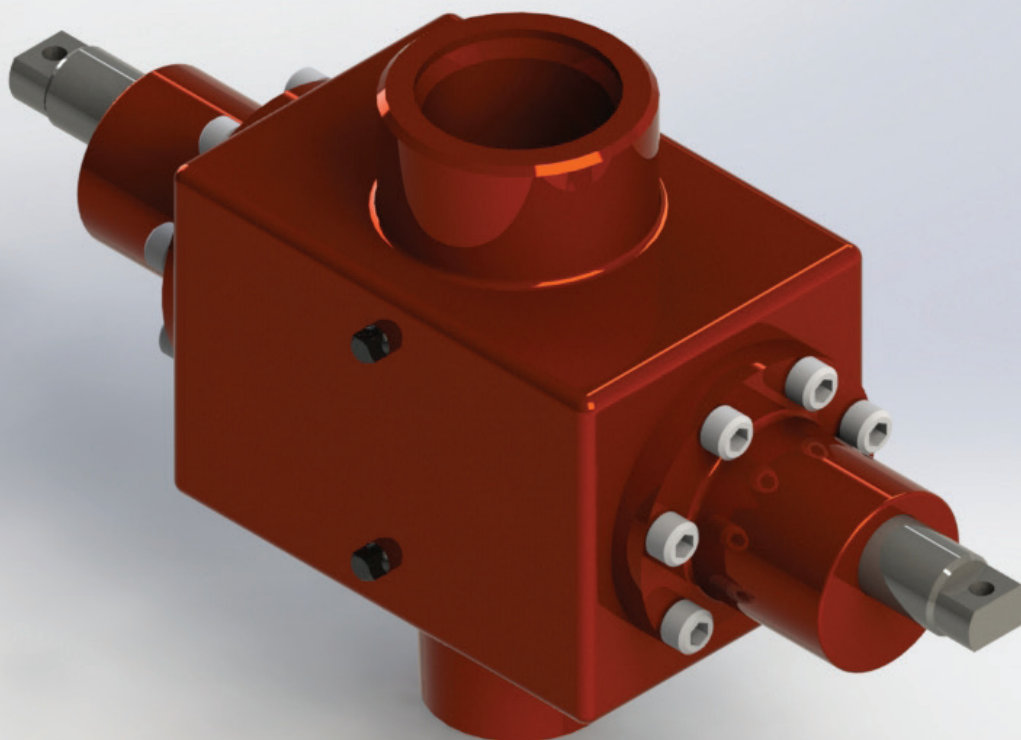

We provide an extensive offering of blowout preventers (BOP) for wells utilizing rod pumps as a form of artificial lift. Our various designs of BOPs can handle a wide range of pressures in both common and extreme applications. Our market leading manufacturing, quality, engineering and service teams have set the highest standard in the industry to support our customers production needs.

Specifications

Specifications	3K Single BOP		
Top connection	2 3/8" EUE	2 7/8" EUE	3 1/2" EUE
Bottom connection	2 3/8" EUE	2 7/8" EUE	3 1/2" EUE
Vertical bore	2.060"	2.510"	3.100"
Working pressure	3,000 psi		
Body and cap material	Alloy Steel		
Ram material	Alloy Steel		
Ram screw and packing gland	Alloy Steel		
Ram size options	1 1/4" and 1 1/2"		
Ram screw packing ring	HSN (HNBR)		
Side outlet connections	N/A		
Height	12"		
Weight	95 lbs		
Width (rams open/closed)	20.75" / 17.75"		

Note: The rams are bi-directional and DO NOT need to be flipped before installation. This rod BOP can be installed pin down or box down.

Ram material	AISI 4130
Ram seal	HSN
Maximum temperature	325°F
Maximum H2S	10%
Maximum CO2	20%

Note: Above temperatures are suggested maximum short term ratings and should not be considered as "continuous operating temperature"

Features

- 3,000 psi MWP
- NACE compliant
- Connections: 2 3/8", 2 7/8" and 3 1/2" EUE Female x Male
- Rams: 1 1/4" and 1 1/2"
- All-steel construction eliminates risk of casting porosity
- 1/4" NPT ports above and below rams for bleeding pressure