

# Compact X Range Explosives Pump



High-performance explosives pump in a compact, lightweight and easy-to-maintain package.

## Technical Specifications

### Capacity

Up to 57 m<sup>3</sup>/hr (Up to 250 GPM)

### Pressure

Up to 24 Bar (Up to 348 psi)

### Temperature


Up to 100° C (Up to 212° F)

## Features and Benefits

Our Compact X Range delivers the same performance you need in a smaller footprint.

- Lighter overall unit weight
- Up to 26% shorter overall length on comparative models
- Optional EZstrip maintain-in-place functionality makes maintenance easy
- Patented rotor/stator geometry reduces damage to high prill explosives for greater blast intensity
- Available in both carbon and stainless steel
- Available in both close-coupled to hydraulic motor and long-coupled to electric motor options

# Compact X Range Pump

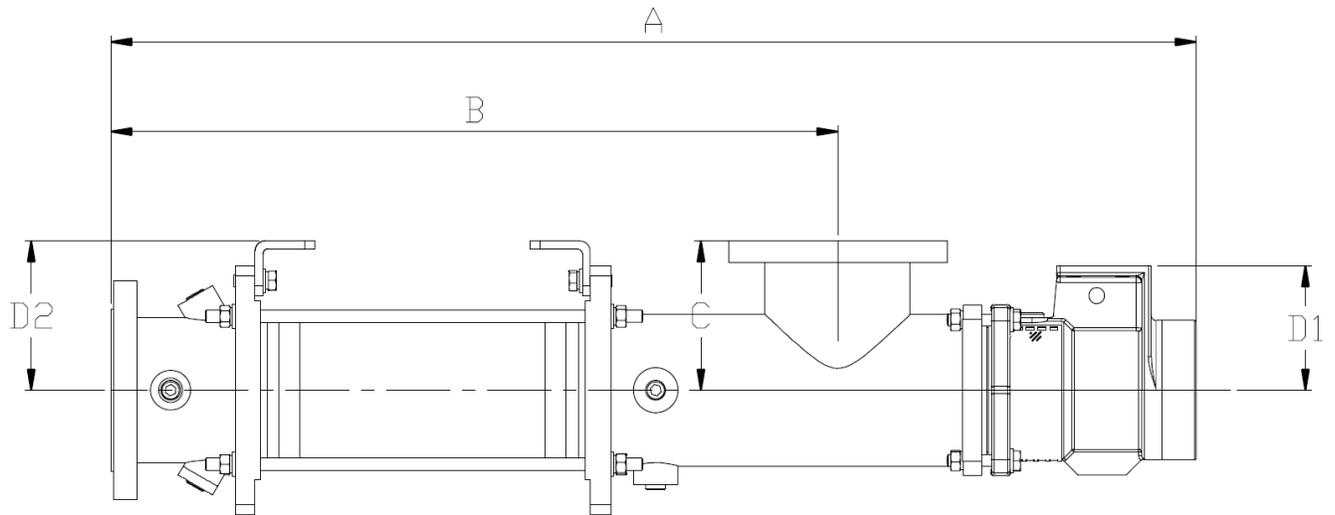

Model	A	B	C	D1	D2
<b>X14D</b>	<b>1583</b> (62.32)	<b>1250</b> (49.21)	<b>150</b> (5.91)	<b>125</b> (4.92)	<b>125</b> (4.92)
<b>X16A</b>	<b>1092</b> (42.99)	<b>731</b> (28.78)	<b>150</b> (5.91)	<b>125</b> (4.92)	<b>150</b> (5.91)
<b>X16B</b>	<b>1468</b> (57.80)	<b>1090</b> (42.91)	<b>150</b> (5.91)	<b>150</b> (5.91)	<b>150</b> (5.91)
<b>X16D</b>	<b>2268</b> (89.29)	<b>1890</b> (74.41)	<b>150</b> (5.91)	<b>150</b> (5.91)	<b>150</b> (5.91)
<b>X17D</b>	<b>2176</b> (85.67)	<b>1763</b> (69.41)	<b>160</b> (6.30)	<b>160</b> (6.30)	<b>160</b> (6.30)
<b>X19C</b>	<b>2224</b> (87.56)	<b>1810</b> (71.26)	<b>160</b> (6.30)	<b>160</b> (6.30)	<b>160</b> (6.30)

All dimensions are in mm (inches) and for guidance only.