


**CYB-43**

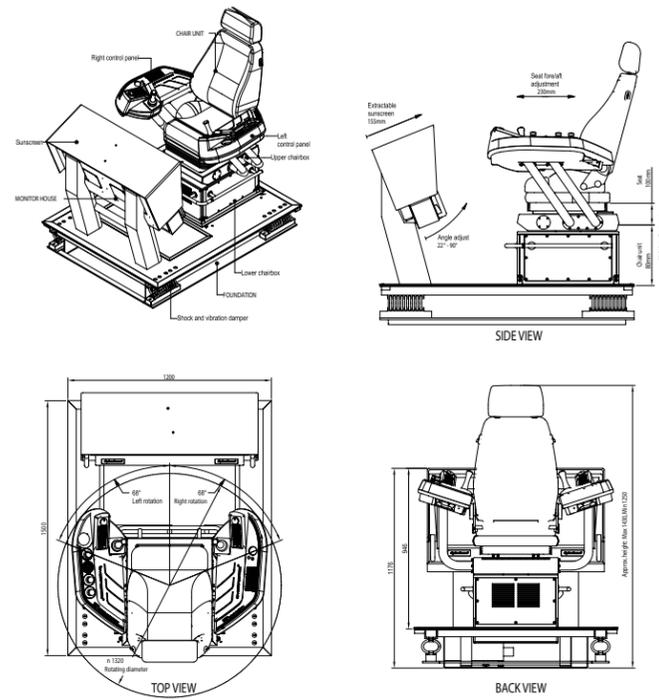

**Features:**

- Adjustable height (relative to floor)
- Default rotation sector of 136 degrees with adjustable end stops in 36 degree steps

**Comfortable Recaro seat with:**

- Durable leather
- Side support

With adjustable:

- Height (relative to control panels)
- Position (fore and aft)
- Seat cushion length and rake of front part
- Lumbar support
- Neck rest
- Seat back angle

**Control panels:**

- Ergonomic component layout
- Angled control joystick
- Track ball
- Mode switch
- Emergency switch
- Numeric and functional keypads.
- Pen holder
- Cup holder
- Attachment for note pad holder

Cyberbase™	CYB-43
Weight	275 kg (607 lb)
Dimensions	1200 x 1500 x 1400 mm (47.2 x 59.95 x 55.12 in)
Control	Control of any machinery
Power Consumption during Operation	320 W
Operating Temperature	-10° C to +50°C
Trademark	Registered Trademark
Machine Interfaces Available	More than 300 different interfaces
Additional Information	PLC Interface on Profibus™ PC/Server interface on Ethernet. IP 56 for the EX version. EExp for zone 1*

**Monitor house**

2 each high quality 20.1" TFT LCD

Laminated anti-reflex glass

Extractable sunscreen

Step-les adjusting of angle

Foot support

**Foundation**

Access hatch to main connection box

Shock and vibration dampers


Recessed mounting

**Service access**

Monitor house: Hinges and internal gas spring.

Upper chair box: Seat mounted to a hinged hatch, flip backward to open main connection box.

**CYB-63**

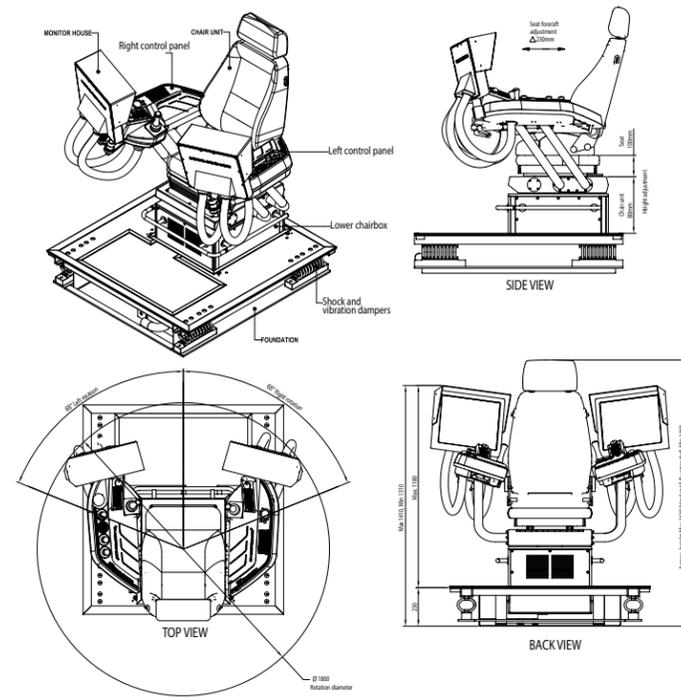

**Features:**

- Adjustable height (relative to floor)
- Default rotation sector of 136 degrees with adjustable end stops in 36 degree steps

**Comfortable Recaro seat with:**

- Durable leather
- Side support

With adjustable:

- Height (relative to control panels).
- Position (fore and aft)
- Seat cushion length and rake of front part
- Lumbar support
- Neck rest
- Seat back angle

**Control panels:**

- Ergonomic component layout
- Angled control joystick
- Track ball
- Mode switch
- Emergency switch
- Numeric and functional keypads
- Pen holder
- Cup holder
- Attachment for note pad holder

Cyberbase™	CYB-63
Weight	200 kg (441 lb)
Dimensions	1200 x 1250 x 1400 mm (47.2 x 49.21 x 55.12 in)
Control	Control of any machinery
Power Consumption during Operation	320 W
Operating Temperature	-10° C to +50°C
Trademark	Registered Trademark
Machine Interfaces Available	More than 300 different interfaces
Additional Information	PLC Interface on Profibus™ PC/Server interface on Ethernet. IP 56 for the EX version. EExp for zone 1*

**Foundation**

Access hatch to main connection box.

Shock and vibration dampers.

Recessed mounting.


**Service access**

Monitor house: Hinges and internal gas spring.

Upper chair box: Seat mounted to a hinged hatch, flip backward to open.

Main connection box: Open floor hatch to access main connection box.

**CYB-7**

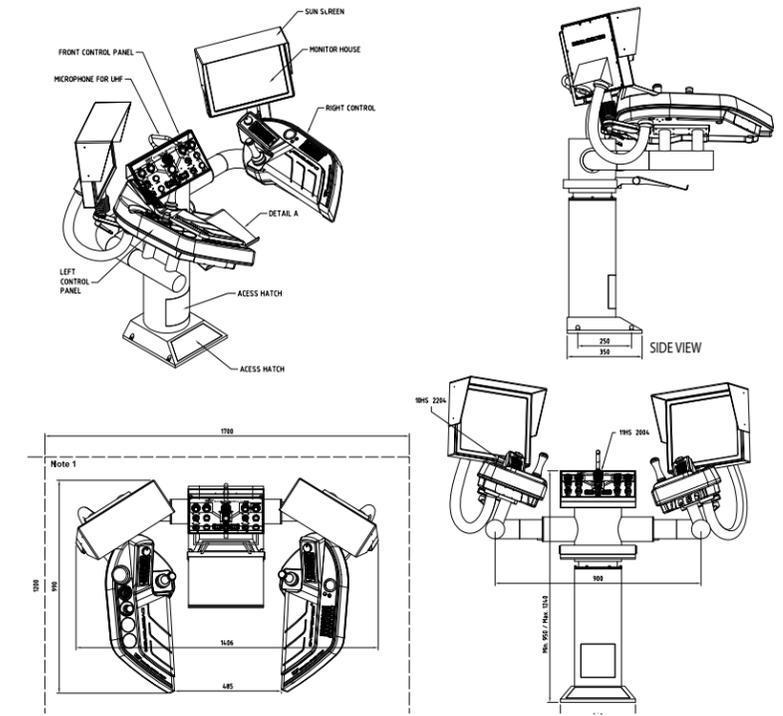

**Features:**

- Adjustable height (relative to floor)
- Default rotation sector of 30 degrees

**Monitor House:**

2 each high quality 19" TFT LCD

Laminated anti-reflex glass

Sunscreen

Stepless adjusting of angle

**Control Panels:**

- Angled control joystick
- Track ball
- Mode switch
- Emergency switch
- Numeric and functional keypads.
- Pen holder
- Cup holder
- Attachment for note pad holder

Cyberbase™	CYB-7
Weight	110 kg (243 lb)
Dimensions	992 x 1409 x 1400 mm (39.05 x 55.2 x 55.12 in)
Control	Control of any machinery
Power Consumption during Operation	310 W
Operating Temperature	-10° C to +50°C
Trademark	Registered Trademark
Machine Interfaces Available	More than 300 different interfaces
Additional Information	PLC Interface on Profibus™ PC/Server interface on Ethernet.