


Offshore Product Line



Offshore Approved Explosion Proof Natural Gas Generators
and Offshore Approved Diesel Generators

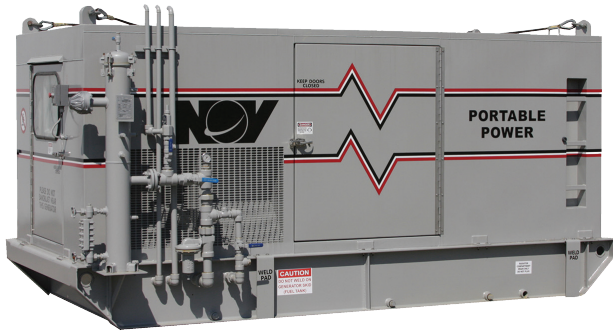

THE SOLUTION TO YOUR POWER AND TEMPERATURE CONTROL NEEDS

Reliability • Portability • Durability



Explosion Proof and Rain Tight
Distribution Rack



Explosion Proof and Rain Tight
Receptacle Rack



Explosion Proof and Rain Tight
Lighting




528 gal to 2,350 gal Dual Wall
Fuel Tanks

Offshore Product Line

Sound Proofed Housing



Coast Guard Certified Hoses

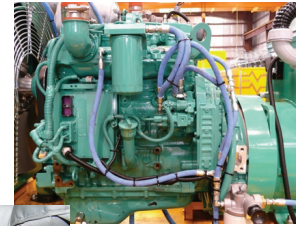

AMOT - Rig Saver



Oil Maintainer and Wrapped Exhaust

Offshore Approved Diesel Generators

KW	VOLTAGE	MAX AMP	WEIGHT	DIMENSIONS (L x W x H)	FUEL TANK	4 PT LIFT	FUEL CONSUMED (AT FULL LOAD)
15 (1ph)	240	78	4,000 lbs	7ft 6in x 3ft 10in x 4ft 9in	80 Gal	Yes	1.4 GAL/HR
50	480 208	75 173	9,200 lbs	12ft x 5ft 1in x 6ft 6in	245 Gal	Yes	3.8 GAL/HR
100	480 208	150 347	10,000 lbs	12ft x 5ft 1in x 6ft 6in	245 Gal	Yes	7.0 GAL/HR
150	480 208	226 520	12,000 lbs	12ft 8in x 5ft 4in x 6ft 6in	275 Gal	Yes	12.5 GAL/HR
200	480 208	301 694	13,000 lbs	13ft 4in x 5ft 6in x 7ft	230 Gal	Yes	17.6 GAL/HR
250	480	376	19,000 lbs	15ft x 7ft x 7ft 9in	450 Gal	Yes	19.5 GAL/HR
350	480	526	21,000 lbs	14ft 8in x 7ft x 7ft 6in	450 Gal	Yes	26.0 GAL/HR
500	480	752	24,000 lbs	15ft 6in x 7ft 7in x 8ft 5in	500 Gal	Yes	31.1 GAL/HR
800	480	1203	34,000 lbs	19ft x 8ft x 8ft 5in	800 Gal	Yes	49.8 GAL/HR
1000	480	1504	38,000 lbs	20ft 6in x 8ft 5in x 10ft	700 Gal	Yes	68.0 GAL/HR
1250	480	1879	47,000 lbs	27ft 6in x 8ft 5in x 10ft	800 Gal	Yes	92.3 GAL/HR
1500	480	2250	47,000 lbs	27ft 6in x 8ft 5in x 10ft	800 Gal	Yes	92.3 GAL/HR

Offshore Approved Explosion Proof Natural Gas Generators

KW	VOLTAGE	MAX AMP	WEIGHT	DIMENSIONS (L x W x H)	FUEL TANK	4 PT LIFT	FUEL CONSUMED (AT FULL LOAD)
75	480	120	9,800 lbs	12ft 6in x 4ft 11in x 6ft 2in	N/A	Yes	970 FT2/HR (1,100 CFH)
150	480	226	14,000 lbs	14ft 8in x 7ft x 7ft 6in	N/A	Yes	2880 FT2/HR (2,773 CFH)
250	480	376	19,000 lbs	17ft x 7ft 1in x 8ft 1in	N/A	Yes	8241 FT2/HR (4,200 CFH)