

NQT Quarter Turn Tubing Anchor

The NQT Quarter Turn Tubing Anchor features quarter turn set and release with same robust slip system featured on the NASI-X packer. The anchor may be landed in tension, compression or neutral position. The anchor includes an adjustable safety straight pull shear release. Special cone design maintains slip engagement through load reciprocation, preventing the anchor from working loose.

The compact design is ideally suited for doglegs and highly deviated wells. The anchor is available in both wicker and carbide slip configuration. Additional sizes available on request.

Features


- Quarter turn set and release
- Adjustable straight pull safety release
- Short overall length is suitable for highly deviated wells

Benefits

- Can be set shallow by pulling tension after initial slip engagement
- Can be landed in tension, compression or neutral position
- Increases pump efficiency.

Applications

- Rod Pump installations
- Deviated wells

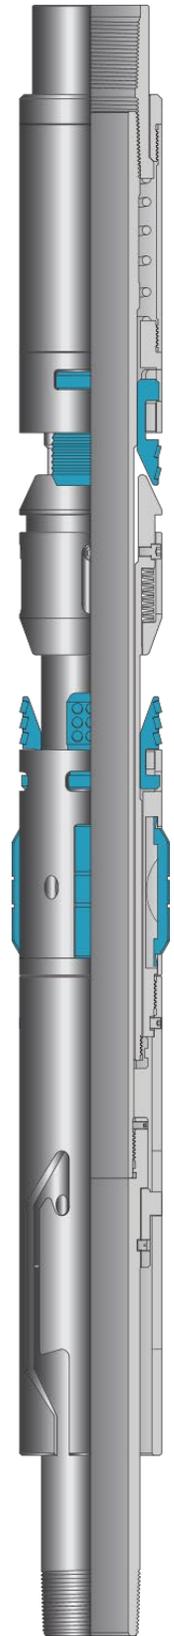

Technical Data

Size in. (mm)	Casing Wt. Range lb / kg	Max. O.D. in. (mm)	Min. I.D. in. (mm)	Thread Connection	Product Number
5.500 139,70	23.0 - 26.0 34,22 - 38,69	4.375 111,13	2.375 60,33	2.875" EU 8 RD	355-58
	20.0 - 23.0 29,76 - 34,22	4.500 114,30	2.375 60,33	2.875" EU 8 RD	355-59
	15.5 - 17.0 23,06 - 25,30	4.625 117,48	2.375 60,33	2.875" EU 8 RD	355-56